


## GLOSS AP904 WK85 FSC® CERTIFIED

### PRODUCT DESCRIPTION / BENEFITS

**Face** : White, woodfree coated paper, gloss.

**Adhesive** : Acrylic permanent adhesive. Good adhesion on a wide variety of materials including apolar substrates (like PE and PP).

**Liner** : One side siliconised clay coated Kraft. There may be slight variations in tone

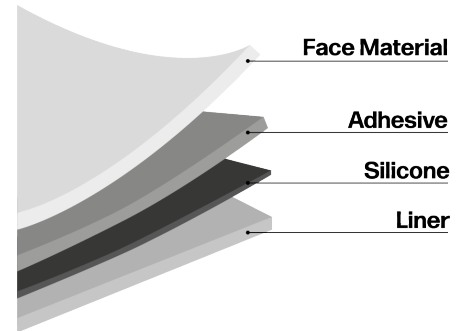

### TYPICAL USE

- Logistics & Mailing
- Promotional & Advertising

### PRINTING & CONVERTING

Suitable for conventional printing methods (traditional offset and litho). Testing for suitability between media, printers and inks is always recommended prior to use.

### PRODUCT RECOMMENDATIONS

High quality promotional labels on sheets.

### SHELF LIFE

2 years in original closed packaging under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

## GLOSS AP904 WK85 FSC® CERTIFIED

PHYSICAL PROPERTIES /  
TYPICAL VALUES

FACE MATERIAL		
<i>GLOSS FSC</i>		
Grammage	80 Gr/m2	ISO 536
Thickness	66 µm	ISO 534-80
ADHESIVE		
<i>AP904</i>		
Tack (N) Glass	11 N	FTM9
Min Labelling Temperature	0 °C	
Usage Temperature	-20/+70 °C	
Peel Value	10 N/25mm	FTM2
LINER		
<i>WK85</i>		
Grammage	82 Gr/m2	ISO 536
Thickness	85 µm	ISO 534-80

QUALITY  
CERTIFICATIONS &  
APPROVALS

- FSC License code: FSC-C106281

**DISCLAIMER**

Information on physico-chemical characteristics and values in this document are based upon tests we believe to be reliable and do not constitute a warranty. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. All Fedrigoni products are sold subject to terms and conditions of sale. For more information, contact your Fedrigoni sales representative. In case of any ambiguities or differences between the English and foreign versions of this document, the English version shall be prevailing and leading.