


PVC GLOSS CLEAR 80 / AP900 / WG74

PRODUCT DESCRIPTION / BENEFITS

Face : Gloss clear soft vinyl.

Adhesive : Acrylic permanent adhesive featuring high clarity and very high cohesion. Designed for a wide variety of substrates such as glass, ABS, PS, PVC. Unsuitable for apolar surfaces (like PE and PP).

Liner : White supercalendered glassine paper one side silicone. There may be slight variations in tone.

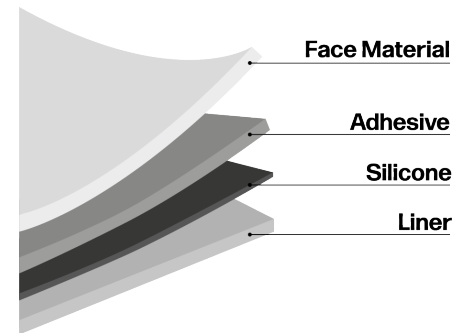

TYPICAL USE

- Retail

PRINTING & CONVERTING

Suitable for printing in Flexography, Offset, Screen. Testing for suitability between media, printers and inks is always recommended prior to use.

PRODUCT RECOMMENDATIONS

Promotional and general uses labels.

SHELF LIFE

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

PVC GLOSS CLEAR 80 / AP900 / WG74

PHYSICAL PROPERTIES /
TYPICAL VALUES

FACE MATERIAL

PVC GLOSS CLEAR 80

Grammage	104 Gr/m2	ISO 536
Thickness	80 µm	ISO 534-80

ADHESIVE

AP900

Tack Glass	7 N	FTM9
Min Labelling temperature	+10 °C	
Usage Temperature	-30/+120 °C	
Peel Value Glass-24 hours	9 N/25mm	FTM2

LINER

WG74

Grammage	72 Gr/m2	ISO 536
Thickness	62 µm	ISO 534-80

DISCLAIMER

Information on physico-chemical characteristics and values in this document are based upon tests we believe to be reliable and do not constitute a warranty. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. All Fedrigoni products are sold subject to terms and conditions of sale. For more information, contact your Fedrigoni sales representative. In case of any ambiguities or differences between the English and foreign versions of this document, the English version shall be prevailing and leading.